

Specifications


SMART Board® MX286 interactive display with iQ

Model SBID-MX286

Overview


Digital whiteboard. Web browser. Screen sharing. Our newest SMART Board® MX series has all the essentials educators need for bringing the devices students love into any learning environment. MX series is a great value for schools that need an interactive display on a budget. Available in 65", 75" and 86" sizes—all in 4K Ultra HD resolution—with SMART Learning Suite included, and a standard three-year warranty.

The SMART Board MX series iQ technology puts everything you need in one place, available at the touch of a finger. No need for wires and cables. The embedded iQ appliance offers one-touch access to SMART Learning Suite applications, including SMART Notebook® lessons, SMART lab™ activities and SMART amp® software workspaces. You can also access collaboration tools, including a digital whiteboard, built-in web browser and wireless screen sharing (iOS and Android™ mobile devices and a wide variety of computers).

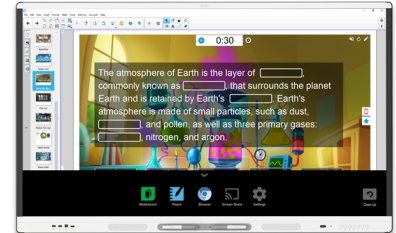

Dimensions and weights¹

Dimensions

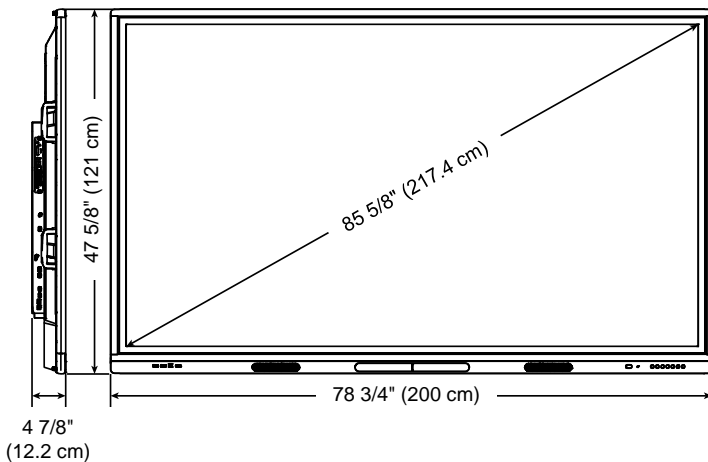

Weight

173 lb. (78.3 kg)

Active touch area

76 3/8" × 43 3/4" (194.1 cm × 111.2 cm)

Active image area

74 5/8" × 42" × (189.5 cm × 106.6 cm)

Shipping dimensions (including pallet)

85 1/4" W × 57 3/8" H × 11 5/8" D
(216.5 cm × 145.7 cm × 29.5 cm)

Shipping weight

240 lb. (109 kg)

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

Hardware

Interaction

| | |
|-------------------------|--|
| Touch technology | IR |
| Multitouch capabilities | Up to 10 simultaneous touch, writing or erase points ² |
| Object awareness | Behavior adjusts automatically to the tool or object you're using, whether it's a pen, finger or palm. |

Display

| | |
|------|-------------|
| Type | LED backlit |
|------|-------------|

| | |
|--------------|------|
| Aspect ratio | 16:9 |
|--------------|------|

| | |
|------------|--------|
| Resolution | 4K UHD |
|------------|--------|

| | |
|----------------------|-------|
| Positioning accuracy | <2 mm |
|----------------------|-------|

| | |
|-----------------------------------|-------|
| Horizontal frequency (minimum) | 31 Hz |
|-----------------------------------|-------|

| | |
|-----------------------------------|---------|
| Horizontal frequency (maximum) | 140 kHz |
|-----------------------------------|---------|

| | |
|---------------------------------|-------|
| Vertical frequency (minimum) | 59 Hz |
|---------------------------------|-------|

| | |
|---------------------------------|-------|
| Vertical frequency (maximum) | 70 Hz |
|---------------------------------|-------|

| | |
|--------------------------|--------|
| Contrast ratio (typical) | 1200:1 |
|--------------------------|--------|

| | |
|----------------------|------------------------|
| Brightness (maximum) | ≥350 cd/m ² |
|----------------------|------------------------|

| | |
|-------------------|-------|
| Refresh frequency | 60 Hz |
|-------------------|-------|

| | |
|-----------------------|---------|
| Pixel clock (maximum) | 600 MHz |
|-----------------------|---------|

| | |
|------------------|---------|
| Pixel dimensions | 0.49 mm |
|------------------|---------|


| | |
|---------------|------|
| Viewing angle | 178° |
|---------------|------|

| | |
|-------------------------|------|
| Response time (typical) | 8 ms |
|-------------------------|------|

| | |
|----------------------|-----|
| Ambient light sensor | Yes |
|----------------------|-----|

| | |
|--------------|-------------------------------|
| Audio | 10 W integrated speakers (×2) |
|--------------|-------------------------------|

²Requires SMART Product Drivers to be installed. Some applications might not support all touch points.

| | | |
|--|--|--|
| Included cables and accessories | iQ appliance Country-specific power cable 16' 5" (5 m) USB cable Wall mount bracket kit Pen (×2) Antennas (×2) IR remote control | |
| iQ appliance | | |
| Wireless technology | Bluetooth® dual mode (backwards compatible with Bluetooth 2.1 + EDR) | |
| Capture options | Establish a Bluetooth wireless connection with a supported mobile device (see below) by scanning the interactive display's unique QR code | |
| Supported languages | French German Italian Japanese Korean Norwegian Simplified Chinese Spanish Swedish Traditional Chinese | |
| Mounting holes | For a standard VESA® 700 mm × 400 mm mounting plate with M8 screws | |
| |  NOTE A wall mount is included with the display. | |
| Mounting bracket depth | Minimum clearance depth of 1 1/4" (3 cm) for all components on the back of the interactive display for airflow | |
| Connectors | | |
| Back | Connector panel: HDMI® in (with HDCP 2.2 support) (×2) VGA in RJ45 (×2) USB Type-B (for touch applications) (×1) USB 2.0 Type-A (×2) HDMI 1.4 out (HDCP-compliant) ³⁴ S/PDIF out (optical) Stereo 3.5 mm in (for VGA in) Stereo 3.5 mm out OPS slot RS-232 control | iQ appliance (AM40): USB 3.0 Type-A (×2) HDMI 1.4 (HDCP-compliant) |

³HDCP is always enabled. Content is shown in 480p resolution if the external display doesn't support HDCP.

⁴HDMI out is an optional feature. Contact your authorized SMART reseller (smarttech.com/where) for further ordering instructions.

SMART BOARD MX286 INTERACTIVE DISPLAY WITH IQ – MODEL SBID-MX286

| | |
|--------------|---|
| Front | HDMI in (with HDCP 1.4 support) USB Type-B (for touch applications) USB Type-A (×2) |
|--------------|---|

Applications

| | |
|----------------------------|--|
| Interactive display | Apps included in the iQ appliance One-year subscription to SMART Learning Suite |
|----------------------------|--|

Installation requirements

| | |
|----------------------------|---|
| Interactive display | See the <i>SMART Board MX series interactive displays installation and maintenance guide</i> (smarttech.com/kb/171257) |
|----------------------------|---|

| | |
|--|---|
| SMART Notebook® Player mobile app | iOS 10 or later operating system software |
|--|---|

SMART kapp® app

| | |
|---------------|---|
| Apple devices | iOS 9 or later operating system software 50 MB of storage iPhone 4S or later Third-generation iPad or later First-generation iPad mini or later Fifth-generation iPod touch or later |
|---------------|---|

| | |
|-----------------|---|
| Android devices | Android 4.4.4 (KitKat) or later operating system 50 MB of storage (internal or SD card) 1024 MB of RAM 720p or better screen resolution Bluetooth 2.1 + EDR 3 megapixel or better rear-facing camera (recommended) |
|-----------------|---|

SMART kapp viewer

| | |
|--------|--|
| Mobile | Safari for iOS 9 or later operating system software Chrome™ for Android 39.0.2171.93 or later |
|--------|--|

| | |
|---------|---|
| Desktop | Internet Explorer® 10 or later Chrome 39.0.2171.95 or later Firefox® 34.0.5 or later Safari 8.0 or later |
|---------|---|

Room computers and guest laptops

| | |
|----------------------|---|
| General requirements | See the SMART Notebook software release notes |
| 4K UHD | Graphics card that supports 3840 × 2160 resolution at 30 Hz and that has 1 GB DDR 5 memory See Minimum requirements for Ultra High Definition or 4K on your interactive flat panel |

Mini-computers

| | |
|----------------------|---|
| General requirements | See the SMART Notebook software release notes |
| Bracket | Optional bracket available |

Cable requirements

HDMI

Maximum length: 23' (7 m)

NOTES

- Use only certified HDMI cables that have been tested to support the performance standard you require
- The performance of cables longer than 23' (7 m) is highly dependent on the cable's quality

USB

Maximum length: 16' (5 m)

Important

Using cables that are longer than these maximum lengths can produce unexpected results, such as degraded picture quality or USB connectivity. Refer to *SMART installation standards* (smarttech.com/kb/171035) for comprehensive information about cables and extensions for SMART hardware products.

Storage and operating requirements

Power requirements 100V to 240V AC, 50 Hz to 60 Hz

Interactive flat panel and IQ appliance power consumption at 77°F (25°C)

Standby mode ≤0.3 W

Maximum operating 265W

Standalone interactive display power consumption at 77°F (25°C)

Standby mode ≤0.3 W

Normal operating
(out-of-box) 250 W

Operating temperature 41–95°F (5–35°C)

Storage temperature -4–140°F (-20–60°C)

Humidity 5–80% relative humidity, non-condensing

Certification and compliance

Regulatory certification (Model ID: IDX86-1) UL (U.S./Canada), FCC, IC, CE, EAC, RCM, NRCS, SABS, CITC, TRA

Environmental compliance

European Union REACH, RoHS, Battery, WEEE and Packaging

U.S. CONEG Packaging, California Proposition 65 and Conflict Minerals

Purchasing information

Order number

| | |
|------------|--|
| SBID-MX286 | SMART Board MX086 interactive display with iQ and SMART Learning Suite |
|------------|--|

Optional accessories

| | |
|-------|--|
| Other | See smarttech.com/accessories |
|-------|--|

Warranty

| | |
|---|---------------------------------------|
| North America and rest of world (except UK) | Three-year limited equipment warranty |
|---|---------------------------------------|

| | |
|----|--------------------------------------|
| UK | Five-year limited equipment warranty |
|----|--------------------------------------|

Extended warranty

| | |
|-----------------|--|
| EWY1-SBID-MX286 | SBID-MX286 interactive display with iQ one-year warranty extension |
|-----------------|--|

| | |
|-----------------|--|
| EWY2-SBID-MX286 | SBID-MX286 interactive display with iQ two-year warranty extension |
|-----------------|--|

smarttech.com/support
smarttech.com/contactsupport

© 2018 SMART Technologies ULC. All rights reserved. SMART Board, SMART Notebook, SMART lab, SMART amp, SMART response 2, DVIT, Pen ID, Object Awareness, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. iPhone, iPad, iPod touch and Safari are trademarks of Apple Inc., registered in the U.S. and other countries. Google Play, Android and Chrome are trademarks of Google Inc. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. 05-2018.